


Lovinė sija UPE:

- EN 10279, DIN1026-1
- S235JR, S275JR, S355J2

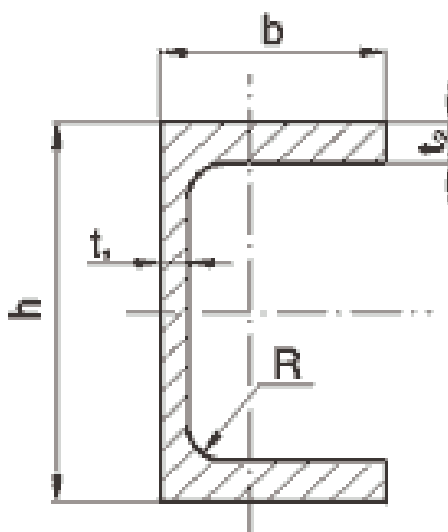

UPE	Matmenys				Skerspjūvio plotas (cm ²)	Svoris (kg/m)
	h (mm)	b (mm)	t1	t2		
80	80	50	4,0	7,0	10,1	7,90
100	100	55	4,5	7,5	12,5	9,82
120	120	60	5,0	8,0	15,4	12,10
140	140	65	5,0	9,0	18,4	14,50
160	160	70	5,5	9,5	21,7	17,00
180	180	75	5,5	10,5	25,1	19,70
200	200	80	6,0	11,0	29,0	22,80
220	220	85	6,5	12,0	33,9	26,60
240	240	90	7,0	12,5	38,5	30,20
270	270	95	7,5	13,5	44,8	35,20
300	300	100	9,5	15,0	56,6	44,40
330	330	105	11,0	16,0	67,8	53,20
360	360	110	12,0	17,0	77,9	61,20
400	400	115	13,5	18,0	91,9	72,20